

SUB 8003-AS II

ACTIVE SUBWOOFER

DESCRIPTION

The SUB 8003-AS II active subwoofer features the latest generation of RCF woofer technology, digital amplifiers and DSP processing with higher power and enhanced performance. It offers the perfect blend of bass reproduction, high SPL and compact dimensions for mobile use by bands and DJs.



FEATURES

- 2200 W
- 135 dB max SPL
- 35 Hz - 120 Hz frequency response
- 18" Woofer, 4.0" v.c.
- Selectable gain, X-over and delay
- Birch tour grade cabinet
- Stereo XLR input, Stereo XLR signal output



TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response:	35 Hz ÷ 120 Hz
	Max SPL @ 1m:	135 dB
Transducers	Woofers:	18", 4.0" v.c
Input/Output section	Input signal:	bal/unbal
	Input connectors:	XLR
	Output connectors:	XLR
	Input sensitivity:	-2 dBu/+4 dBu
Processor section	Crossover Frequencies:	Selectable
	Protections:	Thermal, RMS
	Controls:	Gain, EQ, Phase, Xover, Delay, Cardioid
Power section	Total Power:	2200 W Peak, 1100 W RMS
	Low frequencies:	2200 W Peak, 1100 W RMS
	Cooling:	Convection
	Connections:	Powercon IN/OUT
Standard compliance	CE marking:	Yes
Physical specifications	Cabinet/Case Material:	Baltic birch plywood
	Handles:	2 side
	Pole mount/Cap:	Yes
	Grille:	Steel
	Color:	Black
Size	Height:	694 mm / 27.32 inches
	Width:	523 mm / 20.59 inches
	Depth:	700 mm / 27.56 inches
	Weight:	45 kg / 99.21 lbs
Shipping informations	Package Height:	745 mm / 29.33 inches
	Package Width:	760 mm / 29.92 inches
	Package Depth:	580 mm / 22.83 inches
	Package Weight:	51 kg / 112.44 lbs

PART NUMBER

- **13000433**

SUB 8003-AS II

115V


EAN 8024530014452

- **13000432**

SUB 8003-AS II

220-240V

EAN 8024530014513

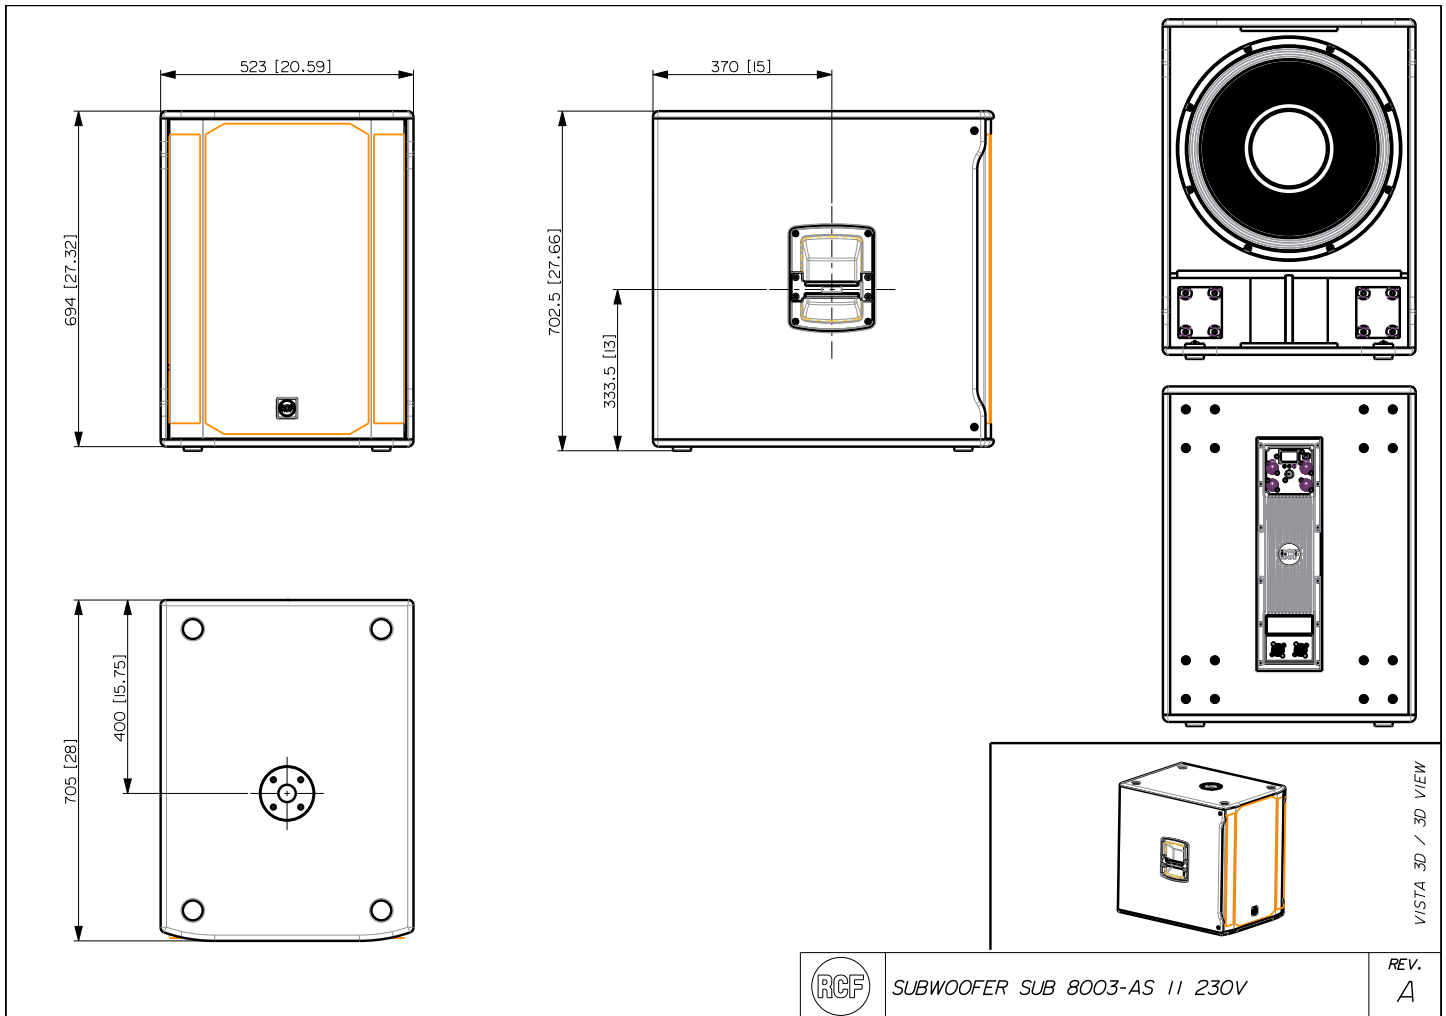

VISTA 3D / 3D VIEW



SUBWOOFER SUB 8003-AS II 230V

REV.
A

