

HD687/HD688 HIGH-FIDELITY HEADPHONES

General Features

- Tailored ultra-high precision double-layer diaphragm design
- Low distortion, keeping high sound quality
- Detachable single side design
- 40 Ω impedance to provide best use with portable device which can also be used with the high-definition headphone amplifier system

HD687


- Semi-open, Circumaural
- Very suitable for classic music appreciation

HD688

- Closed-back, Circumaural
- Excellent sound quality

- Ⓐ Self-adjusting headband
- Ⓑ Detachable
- Ⓒ Cable clip
- Ⓓ Ear pads

Ear Pad Kit EPK687 is for HD687 and HD688 headphone. Each kit includes a pair of earpad and a pair of foam disks.

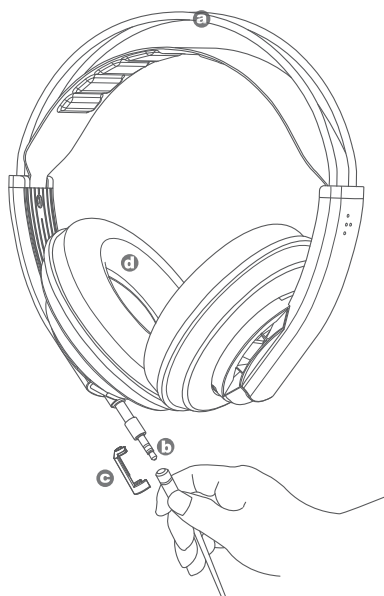

Specifications

Type	HD687 Dynamic, Semi-open HD688 Dynamic, Closed-back
Driver	ø51mm, neodymium
Sensitivity	HD687 92 dB SPL (1mW) at 1KHz HD688 94 dB SPL (1mW) at 1KHz
Frequency Response	10-30,000 Hz
Max. Input Power	200 mW
Rated Impedance	40 Ω (copper-coated aluminum wire)
Headphone Caliper Pressure	5N
Cable	Detachable 1-meter (3.3 ft.) & 3-meter (9.8 ft.) straight, single-sided; plugin cable on headphones (mini stereo connector)
Connectors	Gold plated stereo mini plug
Net Weight (without cable)	250 g (8.8 oz)

Furnished Accessories

