


CP2215

Small-screen auditoriums | Boutique cinema | Post production | Screening rooms

Lowest upfront investment for DCI-compliant cinema on screens up to 58 feet wide



Key features:

- › **Easy to operate** – touch panel, or web-based GUI. Intelligent lens system (ILS™) for fast-set-up
- › **Easy to install** – lightweight all-in-one chassis for flexible mounting
- › **Easy to maintain** – rear access lamp change
- › **Affordable performance** – Christie Xenolite long-life, lower power-consumption lamps
- › **Reliability** – split power operation for use with UPS
- › **Compatibility** – works with Christie and 3rd-party IMBs, accessories and lenses

CHRISTIE XENOLITE

Industry's longest warranted and most reliable lamps - 99.999% uptime

DIGITAL CINEMA CONFIGURATOR

Help find the right lamp for your projector on our website



Specifications


Christie CP2215

| | | |
|----------------------------|-------------|---|
| Brightness ¹ | nominal | • 15,000 lumens |
| | screen size | • 58" screen ¹ |
| | lamp | <ul style="list-style-type: none"> • 1.4kW (CDXL-14M) 003-003066-01 • 1.6kW (CDXL-16M) 003-003900-01 • 1.8kW (CDXL-18SD) 003-0027420-01 • 2.0kW (CDXL-20SD) 003-001976-01 • 2.3kW (CDXL-23S) 003-004769-01 |
| Contrast ratio | | • · 2000:1 full field on/off |
| Supported frame rates | | <ul style="list-style-type: none"> • 2D up to 120 fps • 3D up to 60 fps/eye |
| Digital micromirror device | | <ul style="list-style-type: none"> • 0.98" 2K 3-chip DMD DLP Cinema® • 2048 x 1080 pixels (2K) |
| Number of colors | | • 35.2 trillion |
| Lens mount configuration | | • Fully motorized Intelligent Lens System (ILS™) |
| Lenses | | • 1.05:1 / 1.20-1.75:1 / 1.39-1.90:1 / 1.50-2.20:1 / 1.75-2.40:1 / 1.90-3.0:1 / 2.40-3.90:1 |
| Power input requirements | | <ul style="list-style-type: none"> • Main input: 200-240VAC 50-60Hz, 16A max • UPS input: 100-240VAC @ 50-60Hz, 10A max |
| Power consumption | | • 3200W max |
| Lamp power supply | | • 0.7kW - 2.3kW low-ripple switch mode power supply |
| Weight | | • As installed: 122lbs max (55kg) |
| Dimensions (LxWxH) | | • 27 x 26 x 15" (687 x 665 x 395mm) |
| Accessories | | <ul style="list-style-type: none"> • 90 degree extraction duct adapter • Rack mount stand • Link Decryptor |


¹ Maximum screen size depends upon various factors such as screen gain, lamp age, geometry, etc. Consult your Christie representative for detailed analysis. Measured at screen center.

Supports 3rd party IMB models from Dolby, GDC and others. Please contact Christie for updated compatibility list.


Front view

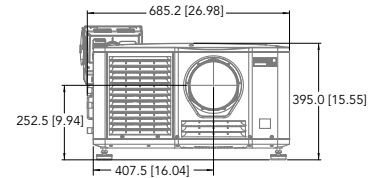


Side view

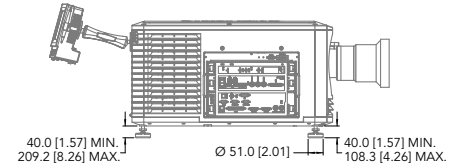

Top view

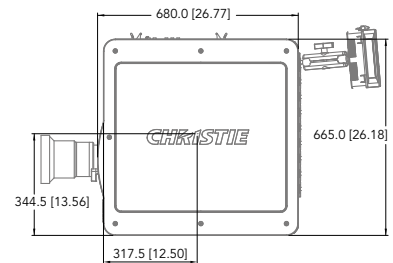

Side view

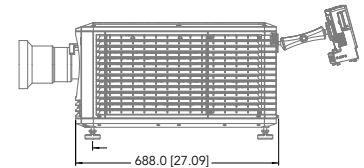

Corporate offices

Christie Digital Systems USA, Inc.
Cypress
ph: 714 236 8610

Christie Digital Systems Canada Inc.
Kitchener
ph: 519 744 8005

Worldwide offices

Australia
ph: +61 (0) 7 3624 4888

Brazil
ph: +55 (11) 2548 4753

China (Beijing)
ph: +86 10 6561 0240

China (Shanghai)
ph: +86 21 6030 0500

Colombia
ph: +57 (318) 477-3179

Eastern Europe
ph: +36 (0)1 47 48 138

France
ph: +33 (0) 1 41 21 44 04

Germany
ph: +49 221 99 512-0

India
ph: +91 (080) 6708 9999

Mexico
ph: +52 55 4744 1790

Singapore
ph: +65 6877 8790

South Korea
ph: +82 2 702 1601

Spain
ph: +34 91 633 9990

United Arab Emirates
ph: +971 (0) 4 503 6800

United Kingdom
ph: +44 (0) 118 977 8000

United States (Arizona)
ph: 602 943 5700

Independent sales consultant offices

Italy
ph: +39 (0) 2 9902 1161

Russia
ph: +7 (495) 930 8961

For the most current specification information, please visit christiedigital.com

Copyright 2020 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
CINE0103-CP2215-Datasheet-Jan-20-EN-US

