

## CP2230

Large-screen auditoriums | Event cinema | Post production

Lowest upfront investment for DCI-compliant cinema on screens up to 86 feet wide



### Key features:

- › **Easy to operate** – touch panel, or web-based GUI. Intelligent lens system (ILS™) for fast-set-up
- › **Affordable performance** – Christie Xenolite long-life, lower power-consumption lamps
- › **Flexibility of brightness** – Operates with standard 2kW up to high performance 6kW lamp
- › **Future-proof** – can be upgraded in the field to native 4K
- › **Brightest picture** – delivers the highest lamp brightness for the longest duration
- › **Reliability** – split power operation for use with UPS

### 2K TO 4K [↗](#) UPGRADE

Transform 2K into a superior 4K cinematic experience

### CHRISTIE [↗](#) XENOLITE

Industry's longest warranted and most reliable lamps - 99.999% uptime

### DIGITAL CINEMA [↗](#) CONFIGURATOR

Help find the right lamp for your projector on our website



## Specifications


## Christie CP2230

Brightness <sup>1</sup>	nominal	• 33,000 lumens
	screen size	• 86' screen <sup>1</sup>
	lamp	<ul style="list-style-type: none"> <li>• 2.0kW (CDXL-20) 003-000598-01</li> <li>• 3.0kW (CDXL-30) 003-000599-01</li> <li>• 4.0kW (CDXL-45) 003-000600-XX</li> <li>• 6.0kW (CDXL-60) 003-000601-XX</li> <li>• 6.0kW (CDXL-60UP) 003-006912-01</li> </ul>
Contrast ratio		• >2000:1 full field on/off
Supported frame rates		<ul style="list-style-type: none"> <li>• 2D up to 120 fps</li> <li>• 3D up to 60 fps/eye</li> </ul>
Digital micromirror device		<ul style="list-style-type: none"> <li>• 1.2" 2K 3-chip DMD DLP Cinema<sup>®</sup></li> <li>• 2048 x 1080 pixels</li> <li>• Upgradeable to 1.38" 4K (4096 x 2160 pixels)</li> </ul>
Number of colors		• 35.2 trillion
Lens mount configuration		• Fully motorized Intelligent Lens System (ILS™)
Lenses		• HB and HC: 1.0:1 (HB lens) / 1.25-1.83:1 / 1.45-2.05:1 / 1.60-2.40:1 / 1.80-3.0:1 / 2.15-3.60:1 / 3.0-4.30:1 (HB lens)
Power input requirements		• Main Input (Head Only): 200-240VAC @ 50-60Hz 6A max
Power consumption		• 8800W max
Lamp power supply		• 7.0 kW low-ripple switch mode power supply
Weight		<ul style="list-style-type: none"> <li>• As installed: 245lbs max (111kg)</li> <li>• Lamp power supply: 70lbs max (32kg)</li> </ul>
Dimensions (LxWxH)		• 47.2 x 25.4 x 18.9" (1199 x 644 x 480mm)
Accessories		<ul style="list-style-type: none"> <li>• Lamp power supply kit 7.5m</li> <li>• Lamp power supply kit 15m</li> <li>• Lamp power supply kit 30m</li> <li>• Rack mount stand</li> <li>• Nema-L6 30A 250V male PWR plug w/1.5m cord</li> </ul>


<sup>1</sup> Maximum screen size depends upon various factors such as screen gain, lamp age, geometry, etc. Consult your Christie representative for detailed analysis. Measured at screen center.

Supports 3rd party IMB models from Dolby, GDC and others. Please contact Christie for updated compatibility list.


## Front view




## Side view

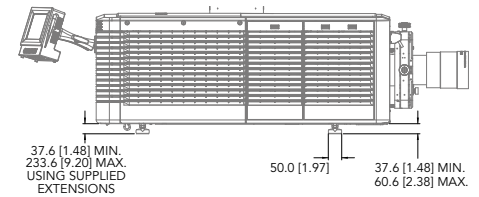

## Top view

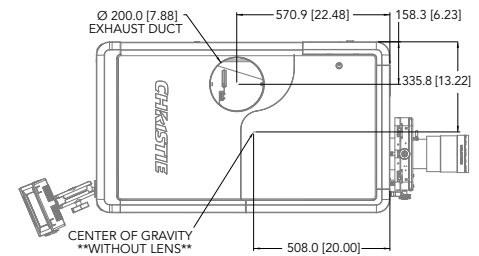

## Side view

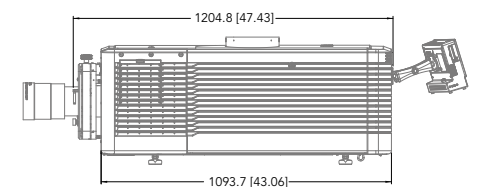

### Corporate offices

Christie Digital Systems USA, Inc.  
Cypress  
ph: 714 236 8610

Christie Digital Systems Canada Inc.  
Kitchener  
ph: 519 744 8005

### Worldwide offices

Australia  
ph: +61 (0) 7 3624 4888

Brazil  
ph: +55 (11) 2548 4753

China (Beijing)  
ph: +86 10 6561 0240

China (Shanghai)  
ph: +86 21 6030 0500

Colombia  
ph: +57 (318) 477-3179

Eastern Europe  
ph: +36 (0)1 47 48 138

France  
ph: +33 (0) 1 41 21 44 04

Germany  
ph: +49 221 99 512-0

India  
ph: +91 (080) 6708 9999

Mexico  
ph: +52 55 4744 1790

Singapore  
ph: +65 6877 8790

South Korea  
ph: +82 2 702 1601

Spain  
ph: +34 91 633 9990

United Arab Emirates  
ph: +971 (0) 4 503 6800

United Kingdom  
ph: +44 (0) 118 977 8000

United States (Arizona)  
ph: 602 943 5700

### Independent sales consultant offices

Italy  
ph: +39 (0) 2 9902 1161

Russia  
ph: +7 (495) 930 8961

For the most current specification information, please visit [christiedigital.com](http://christiedigital.com)

Copyright 2020 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.  
CINE0101-CP2230-Datasheet-Jan-20-EN-US

