## InterM MS-200S

### **FEATURES**

- Compact subwoofer for MS Series 2Way fullrange system
- High-quality sound
- Nordic birch plywood enclosure



### APPLICATIONS

- Religious facility
- Educational institution
- Conference room
- Multipurpose room
- Restaurant

### **OVERVIEW**

MS Series is consist of 5" 2Way, 6" 2Way, 8" 2Way, 10" subwoofer and dual 10" subwoofer system.

MS Series is the loudspeakers that are used for the purpose of reinforcing the intelligibility of the auxiliary speakers or shade area when designing the space required along the main speakers and the secondary speakers. The shape and capacity take the form that may be used as the foreground or the background speaker. MS Series offers a beautiful appearance and excellent sound quality which suit in important facilities. It is made to be installed in various applications.


MS series, has a bright sound character. The superb treble tone it produces is in harmony with the bass reproduction. As a result, it realizes smooth frequency characteristics and is suitable for music playback applications that require the audio and hi-fi sound quality.

### SPECIFICATIONS

| Туре                        | Passive Subwoofer                   |
|-----------------------------|-------------------------------------|
| Frequency Range (±3dB)      | 30Hz ~ 688Hz                        |
| Frequency Response (-10dB)  | 26Hz ~ 837Hz                        |
| Rated Power (AES)           | 200W                                |
| Rated Power (Program)       | 400W                                |
| Rated Power (Peak)          | 800W                                |
| Recommended Amplifier Power | 400W                                |
| Sensitivity (1W/1m)         | 78dB                                |
| Maximum SPL (Peak)          | 107dB                               |
| Nominal Dispersion          | OMNI                                |
| Nominal Impedance           | 8Ω                                  |
| LF Driver                   | 10" Woofer 2" voice coil            |
| HF Driver                   | -                                   |
| Horn                        | -                                   |
| Enclosure Material          | 12T Birch Plywood, Polyurea Coating |
| Grille                      | SECC 1.5t, Powder Coating / BLACK   |
| Connection                  | 2 X SPEAKON(1+,1-) [Parallel]       |
| Fittings/Suspension         | -                                   |
| Finish                      | Polyurea Coating                    |
| Color                       | BLACK/WHITE                         |
| Weights (Net)               | 12.95kg/28.7lb                      |
| Dimensions (Net, WxHxD)     | 365×320×435mm/14.4×12.6×17.1in      |
| Optional Accessories        | -                                   |
|                             |                                     |


# interM MS-200S


### **FREQUENCY RESPONSE**

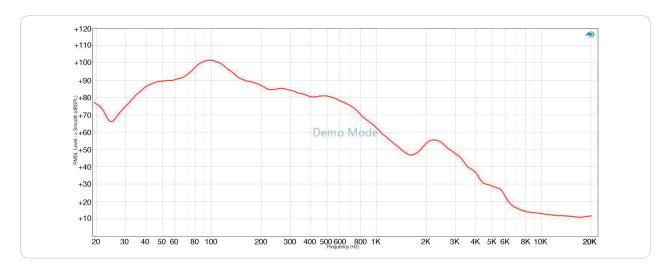

### DIMENSION

### **POLAR PATTERN**







#### **Inter-M Corporation**

- Office : 719, Dobong-ro, Dobong-gu, Seoul, Korea - Tel : +82-2-2289-8140~8, Fax : +82-2-2289-8149

- Home page: http://www.inter-m.com, E-mail: overseas@inter-m.com

Inter-M Corporation (USA)

- Office : 5666 Corporate Ave. Cypress, CA 90630 Tel : +1-714-523-1870, Fax : +1-714-523-1882
- Home Page : http://www.inter-m.com, E-mail : info@inter-m.net

\* Design and specification are subject to be changed for the improvement of product quality without pre notice.