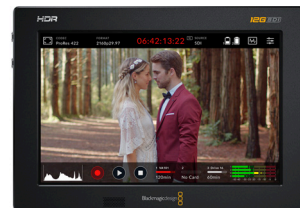Blackmagic**design**

Blackmagic Video Assist
7" 12G HDR

Blackmagic Video Assist 7" 12G HDR adds professional monitoring and recording to any SDI or HDMI camera in all HD, Ultra HD, 2K and 4K DCI formats! The super bright 2500nit 7 inch HDR monitor supports 3D LUTs and features professional scopes along with powerful focus assist and exposure tools that help you accurately set focus, exposure and frame shots. Dual built in SD card recorders save files from any camera in 10-bit 4:2:2 ProRes or DNx formats. You also get two mini XLR connections with 48V of phantom power and a noise floor of -128dBV for high quality, crystal clear audio recording. Plus, you can start editing immediately because you don't have to convert the files!

$995

Connections

SDI Video Inputs
1

SDI Video Outputs
1

SDI Rates
270Mb, 1.5G, 3G, 6G, 12G.

HDMI 2.0a Video Inputs
1

HDMI 2.0a Video Outputs
1

Analog Audio Inputs
2 x balanced mini XLR with phantom power

Analog Audio Outputs
1 x 3.5 mm headphone jack.

Built in Speaker
Mono

Screen Dimensions
7 inch 1920 x 1200.

Screen Brightness
2500nits

Screen Color
P3 wide color gamut

SDI Audio Inputs
16 channels embedded via 12G-SDI

SDI Audio Outputs
16 channels embedded via 12G-SDI

HDMI Audio Inputs
8 channels embedded via HDMI 2.0a

HDMI Audio Outputs
8 channels embedded via HDMI 2.0a

Remote Control
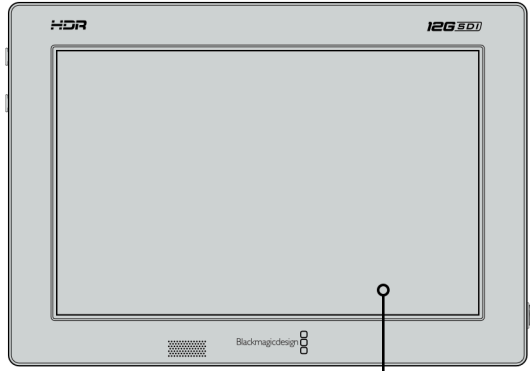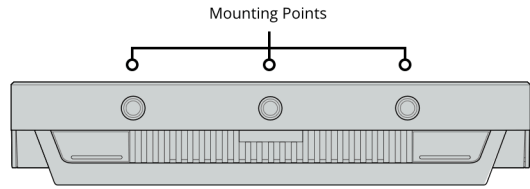1 x 2.5mm LANC for Record Start and Stop.

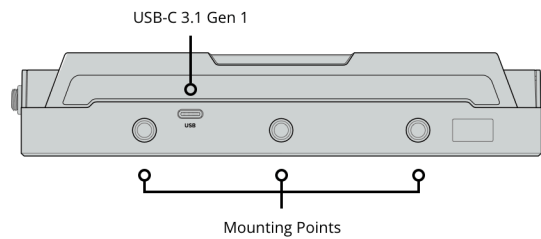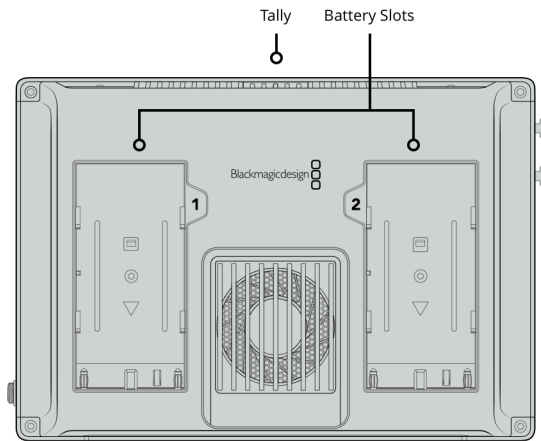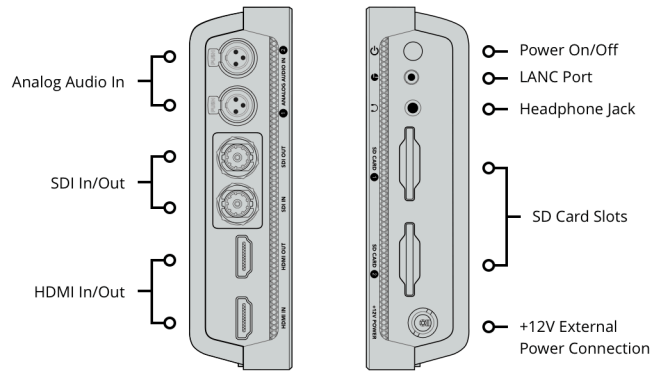**SD Interface**
Dual UHS-II SD slots

Storage Type
Removable SDXC UHS-II, SDXC UHS-I and SDHC UHS-I SD cards.
Supports DS, HS, SDR12, SDR25, DDR50, SDR50 and SDR104 SD cards.

Computer Interface
1 x USB Type-C 3.1 Gen 1 for external drive recording, webcam out, initial setup, software updates and Video Assist Utility software control.

Mounting Points

HDR   12G SDI

Blackmagicdesign

7 Inch 1920 x 1200
High Brightness Touchscreen

Analog Audio In

SDI In/Out

HDMI In/Out

Power On/Off
LANC Port
Headphone Jack

SD Card Slots

+12V External
Power Connection

Tally   Battery Slots

Blackmagicdesign

1   2

USB-C 3.1 Gen 1

USB

Mounting Points

SDI Video Standards

SD Video Standards
525i59.94 NTSC, 625i50 PAL

HD Video Standards
720p50, 720p59.94, 720p60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
1080PsF23.98, 1080PsF24,
1080PsF25, 1080PsF29.97, 1080PsF30
1080i50, 1080i59.94, 1080i60

2K Video Standards
2Kp23.98 DCI, 2Kp24 DCI, 2Kp25 DCI
2KPsF23.98 DCI, 2KPsF24 DCI,
2KPsF25 DCI

Ultra HD Video Standards
2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

4K Video Standards
4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI

SDI Compliance
SMPTE 259M, SMPTE 292M,
SMPTE 296M, SMPTE 425M,
SMPTE 2084

SDI Metadata Support
HD RP188

Audio Sampling
Television standard sample rate of
48 kHz and 24-bit.

Video Sampling
4:2:2 YUV

Color Precision
10-bit

Color Space
REC 601, REC 709, REC 2020

HDR Support
HDR10, Hybrid Log Gamma

Multiple Rate Support
SDI and HDMI switches between
270 Mb/s, 1.5 Gb/s, 3 Gb/s, 6 Gb/s
and 12 Gb/s

SDI RAW
Blackmagic RAW

HDMI Video Standards

SD Video Standards
525i59.94 NTSC, 625i50 PAL

HD Video Standards
720p50, 720p59.94, 720p60
1080p23.98, 1080p24, 1080p25,
1080p29.97, 1080p30, 1080p50,
1080p59.94, 1080p60
1080i50, 1080i59.94, 1080i60

Ultra HD Video Standards
2160p23.98, 2160p24, 2160p25,
2160p29.97, 2160p30, 2160p50,
2160p59.94, 2160p60

4K Video Standards
4Kp23.98 DCI, 4Kp24 DCI, 4Kp25 DCI

HDMI Color Precision
10-bit

HDR Support
HDR10, Hybrid Log Gamma

Copy Protection
HDMI input is unable to capture from
copy protected HDMI sources. Always
confirm copyright ownership before
capture or distribution of content.

Media

Media
2 x UHS-II SD for Ultra HD,
compatible with regular SD for
HD recording. USB Type-C 3.1 Gen 1
for external drive recording.

Media Type
SDXC UHS-II, SDXC UHS-I and SDHC
UHS-I SD cards.

Supported Codecs

Blackmagic RAW Constant Bitrate 3:1, Blackmagic RAW Constant Bitrate 5:1, Blackmagic RAW Constant Bitrate 8:1, Blackmagic RAW Constant Bitrate 12:1, Blackmagic RAW Constant Quality Q0, Blackmagic RAW Constant Quality Q5,

Apple ProRes 422 HQ, Apple ProRes 422, Apple ProRes 422 LT, Apple ProRes 422 Proxy, DNxHR HQX, DNxHR SQ, DNxHR LB, DNxHR HQX MXF, DNxHR SQ MXF, DNxHR LB MXF.

Control

Recorder Control
Integrated capacitive touchscreen LCD with onscreen controls for settings and navigating menus.

External Control
LANC, SDI and HDMI start/stop and timecode run.

Blackmagic RAW

Supported Cameras
Canon EOS C300 Mark II, FUJIFILM GFX100, FUJIFILM GFX100S, Nikon Z 6, Nikon Z 7, Nikon Z 6II, Nikon Z 7II, Panasonic AU-EVA1, Panasonic LUMIX GH5S, Panasonic LUMIX BGH1, Panasonic LUMIX BS1H, Panasonic LUMIX S1, Panasonic LUMIX S1H, Panasonic LUMIX S5, SIGMA fp

Software

**Software Included**
Blackmagic OS

Scopes

Scopes
Waveform, RGB Parade, Vector, Histogram.

Viewing Modes
Scopes with picture in picture or picture overlay and opacity control. Waveform and Parade with standard and HDR graticules.

Operating Systems

Mac 10.14 Mojave,
Mac 10.15 Catalina or later.

Windows 8.1 and 10.

Power Requirements

Power Supply

1 x External 12V power supply.
Compatible with Sony NP-F style
batteries.
(batteries not included)

Physical Specifications

7.6 in

1.45 in

5.14 in

29.1 oz

Environmental Specifications

Operating Temperature
0° to 40° C (32° to 104° F)

Storage Temperature
-20° to 45° C (-4° to 113° F)

Relative Humidity
0% to 90% non-condensing

What's Included

Blackmagic Video Assist 7" 12G HDR
Universal power supply with locking connector and international adapters

Warranty

12 Month Limited Manufacturer's Warranty.

Blackmagic Design Authorized Reseller